
Guardian™



High Speed Serial Connectivity for Remote Monitoring and Control

The Guardian[™] wireless modem provides a high-speed data link suitable for a wide variety of applications requiring system security and diagnostic reporting. Designed for speed and efficiency, the Guardian is applicable for analog operation such as paging, phone line substitution and slow speed data use cases.

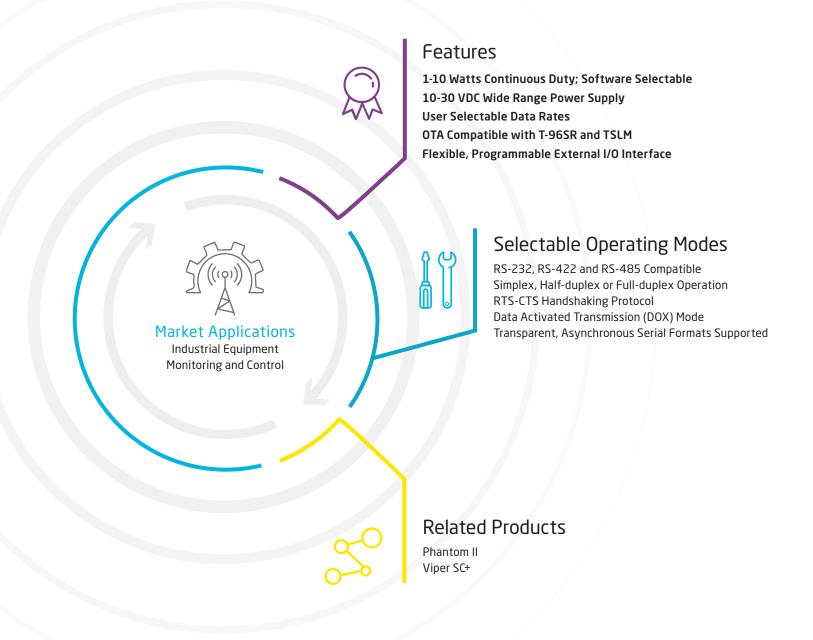

 in y □ f ₀
o 2020 CalAmp. All specifications are typical and subject to change without notice. GUARQ220DS V5 A

Cal/Amp[®]

CalAmp 15635 Alton Pkwy Ste 250 Irvine, CA 92618 888.3CALAMP calamp.com

Guardian[™] Technical Specifications

General

| Frequency Range | 136-174 MHz, 406-512 MHz |
|--------------------|--|
| Channel Bandwidth | 12.5 kHz, 25 kHz |
| Modes of Operation | Modem and Analog: Simplex, half-duplex, full-duplex |
| Modulation | 2FSK |

Receiver Standards

| Bit Error Rate | @lx10 ⁻⁶ |
|------------------|----------------------------------|
| 12.5 kHz | -107 dBm @ 9.6 kbps |
| | -110 dBm @ 4.8 kbps |
| 25 kHz | -100 dBm @ 19.2 kbps |
| | -107 dBm @ 9.6 kbps |
| | -110 dBm @ 4.8 kbps |
| Adjacent Channel | 60 dB @ 12.5 kHz; 70 dB @ 25 kHz |

100% (Power foldback for high temps)

Electrical

| Tx Current | 1.2-3.6A @ 10V; 0.6-1.8A @ 20V; 0.4-1.2A @ 30V |
|---------------|--|
| Rx Current | 360mA @ 10V; 200mA @ 20V; 150mA @ 30V (Typ) |
| Primary Power | 10-30 VDC |

Environmental

| Temperature | -30° to +60° C |
|-------------|--|
| | -40° to +70° C (w/ 50% duty cycle at 10W RF power) |
| Humidity | 5% to 95% non-condensing |

Physical/Design

| Dimensions | 5.50" x 2.125" x 4.25" (13.97 x 5.40 x 10.8 cm) |
|------------|---|
| Weight | 2.4 lbs. (1.1 kg) |

Interface Standards

| Serial COM 1, COM 2 | RS-232 DB-9 |
|---------------------|---|
| Analog User | I/O Right Angle, RS-422, RS-485, 8 Contacts (Male) |
| Antenna | TNC female (Tx/Rx), SMA female (Rx)-Full duplex models only |

Certifications

Output Impedance

Frequency Stability

Carrier Output Power

Duty Cycle

Industry Certifications

FCC, IC, UL Class I, Div. II

1.0 ppm 1-10 watts

50 Ω



This equipment is suitable for use in Class I, Division 2, Groups A, B, C and D OR non-hazardous locations only.

WARNING: WARNING – EXPLOSION HAZARD – Do not disconnect equipment unless power has been removed or the area is known to be non-hazardous.

WARNING: EXPLOSION HAZARD – Substitution of components may impair suitability for Class I, Division 2.

CALIFORNIA PROPOSITION 65



NG: This product can expose you to chemicals including Carbon black and Nickel, which are known to the State of California to cause cancer, and including Bisphenol A and 1,3-Butadiene, which are known to the State of California to cause birth defects or other reproductive harm. For more information go to <u>www.P65Warnings.ca.gov</u>